


GAINING A PARTNER, NOT JUST A PROVIDER

CONTACT US TODAY // 270.830.8512 // ALLSTATE TOWER, INC., P.O. BOX 25, HENDERSON, KY 42420



4015 SELF-SUPPORTING TOWER

- Available in section heights of 10 foot and 20 foot increments with a maximum height of 120 feet.
- Great for WISP, Broadband, & SCADA applications.
- Can accommodate up to 12.5 sq. ft. of EPA without ice and up to 20.83 sq. ft. of EPA with 1/2" radial ice at 90 mph basic wind speed.
- In-stock and ready to ship.
- All welded sections for expedited construction.
- Solid steel leg and inner member design.
- Climbing ladder designs are built into the face of the tower.
- Standard EIA/TIA grounding package provided.
- 6, 9, 12, & 15 hole bolt-on waveguide tabs.
- Pre-shipment of template, bearing plates, and anchor bolts available.
- Full range of tower accessories available and in stock.
- Designed to the latest EIA/TIA-222 Rev G standards while utilizing the latest TNX Tower Design software.
- Licensed engineer sealed prints (P.E./S.E.) available for all 50 states.
- Hot dipped galvanized per ASTM 123 standards.
- Painting provided per FAA standards when required.
- Centralized manufacturing facility that reduces freight cost.
- Designed to meet all international building codes.
- Manufactured & containerized for exports.

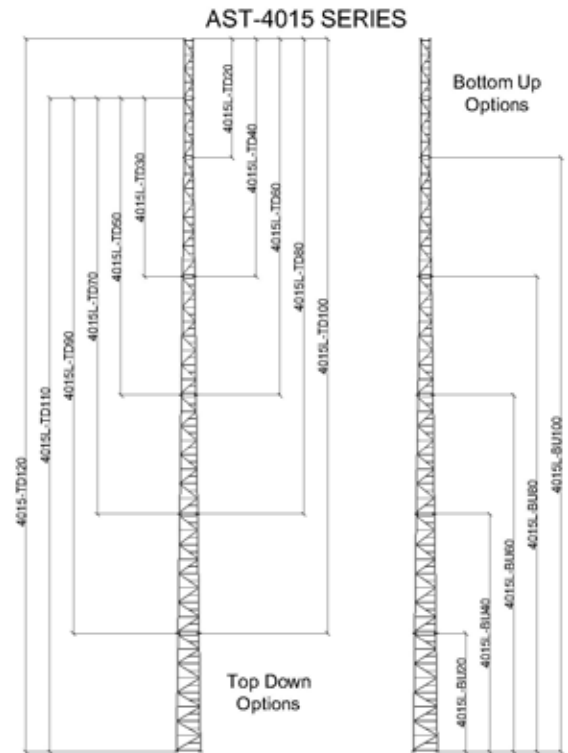

**STRUCTURE.
& INTEGRITY.**

